

Qty.	Description
------	-------------

1	UPS 32-60 180
---	---------------



Note! Product picture may differ from actual product

Product No.: [98368440](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump has 3-step speed selector.

The pump is characterized by:

- * Ceramic shaft and radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can and bearing plate.
- * Corrosion-resistant impeller, Composite.
- * Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m ³

Technical:

Rated flow:	1.89 m ³ /h
Rated head:	3.127 m
TF class:	110
Approvals:	VDE,AAA

Materials:

Pump housing:	Cast iron EN 1561 EN-GJL-150 ASTM 30 B
Impeller:	Composite PES+30% GF

Installation:

Maximum ambient temperature:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm

Electrical data:

Power input in speed 1:	50 W
Power input in speed 2:	55 W



Company name:

Created by:

Phone:


Date:

13/07/2024


Qty.	Description
------	-------------

1	Max. power input: 60 W
	Mains frequency: 50 Hz
	Rated voltage: 1 x 230 V
	Current in speed 1: 0.21 A
	Current in speed 2: 0.25 A
	Current in speed 3: 0.28 A
	Capacitor size - run: 2.5 µF
	Enclosure class (IEC 34-5): IP44
	Insulation class (IEC 85): F
	Built-in motor protection: NONE
	Others:
	Terminal box position: 9H
	Net weight: 2.9 kg
	Gross weight: 3.82 kg
	Shipping volume: 0.004 m ³


98368440 UPS 32-60 180 50 Hz

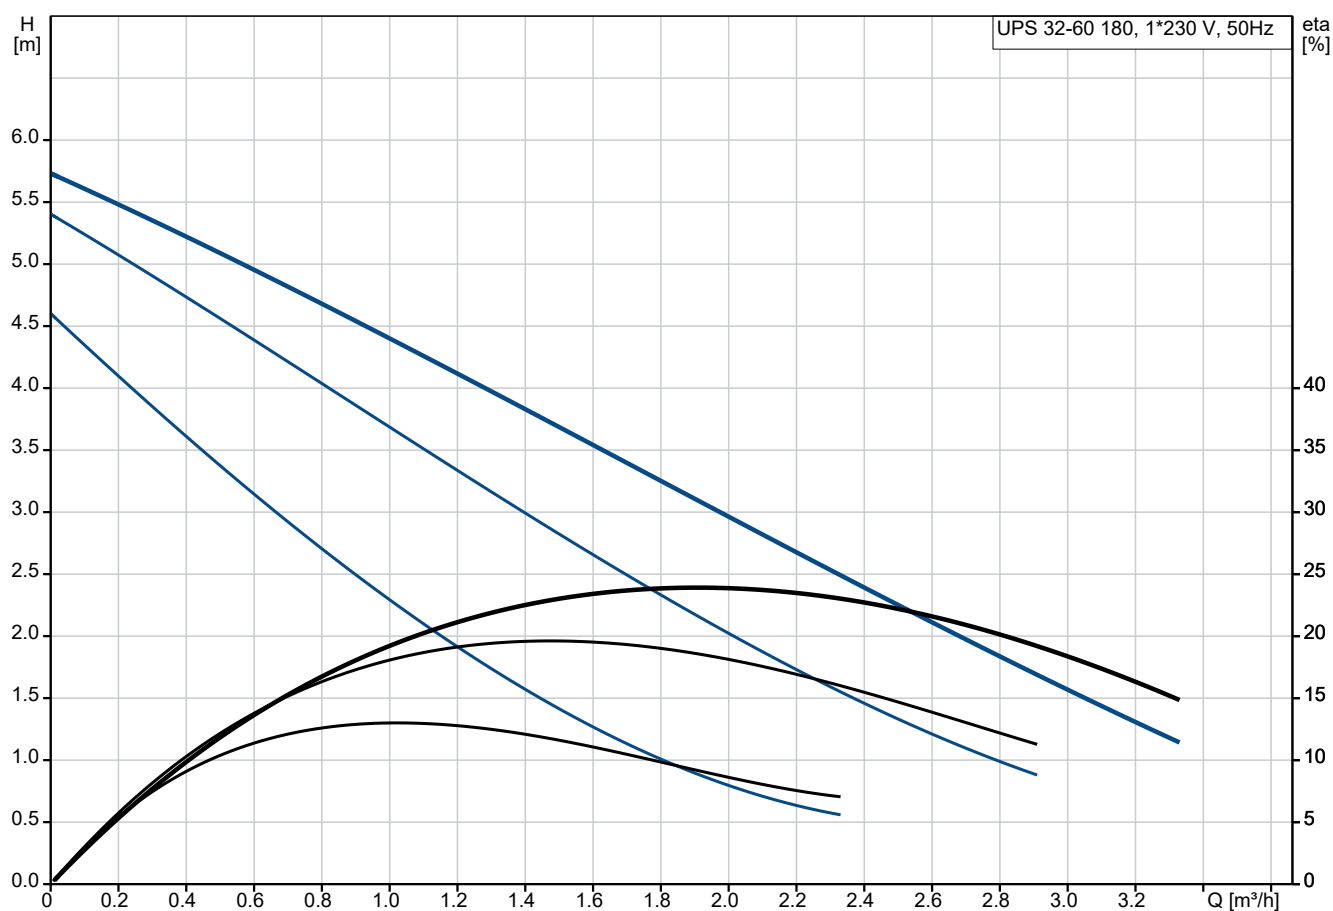




Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

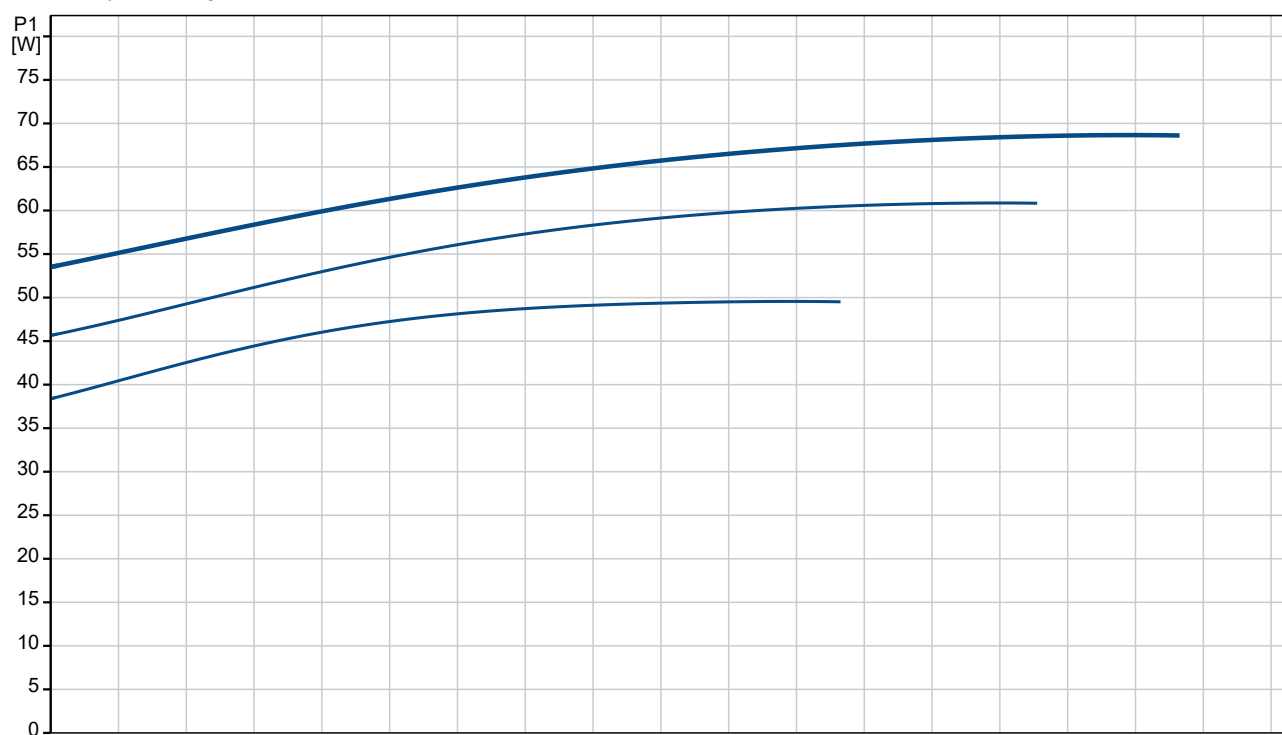


Description	Value
General information:	
Product name:	UPS 32-60 180
Product No:	98368440
EAN number:	5711493789475
Technical:	
Speed no:	3
Rated flow:	1.89 m³/h
Rated head:	3.127 m
Maximum head:	60 dm
TF class:	110
Approvals:	VDE,AAA
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-150
Pump housing:	ASTM 30 B
Impeller:	Composite
Impeller:	PES+30% GF
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Power input in speed 1:	50 W
Power input in speed 2:	55 W
Max. power input:	60 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.21 A
Current in speed 2:	0.25 A
Current in speed 3:	0.28 A
Capacitor size - run:	2.5 µF
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	IMP
Others:	
Terminal box position:	9H
Net weight:	2.9 kg
Gross weight:	3.82 kg
Shipping volume:	0.004 m³

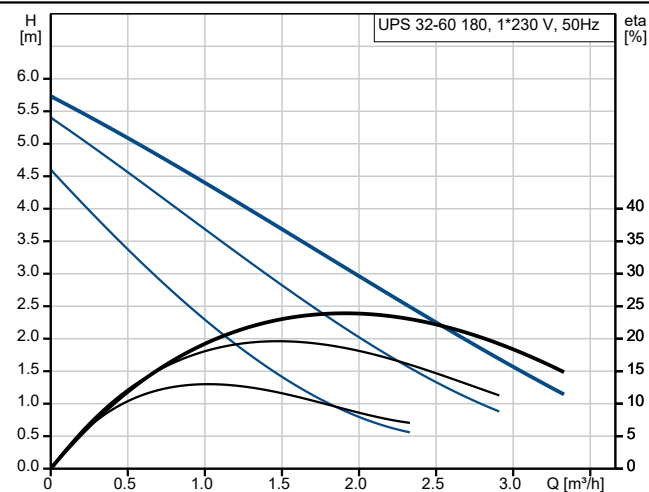

Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

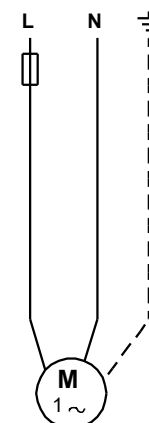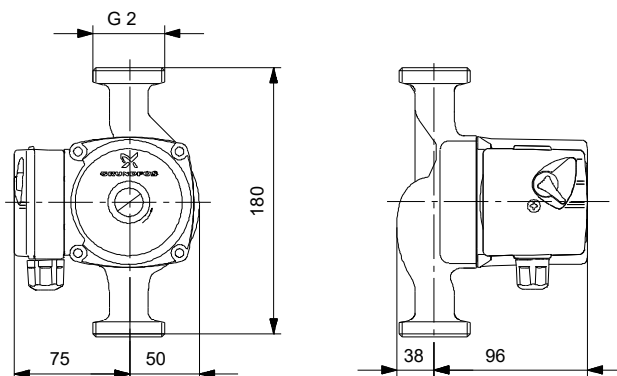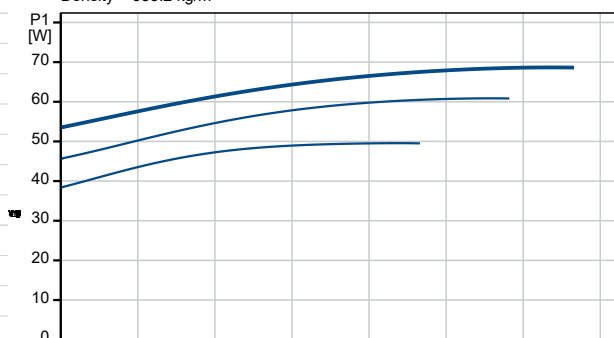

98368440 UPS 32-60 180 50 Hz

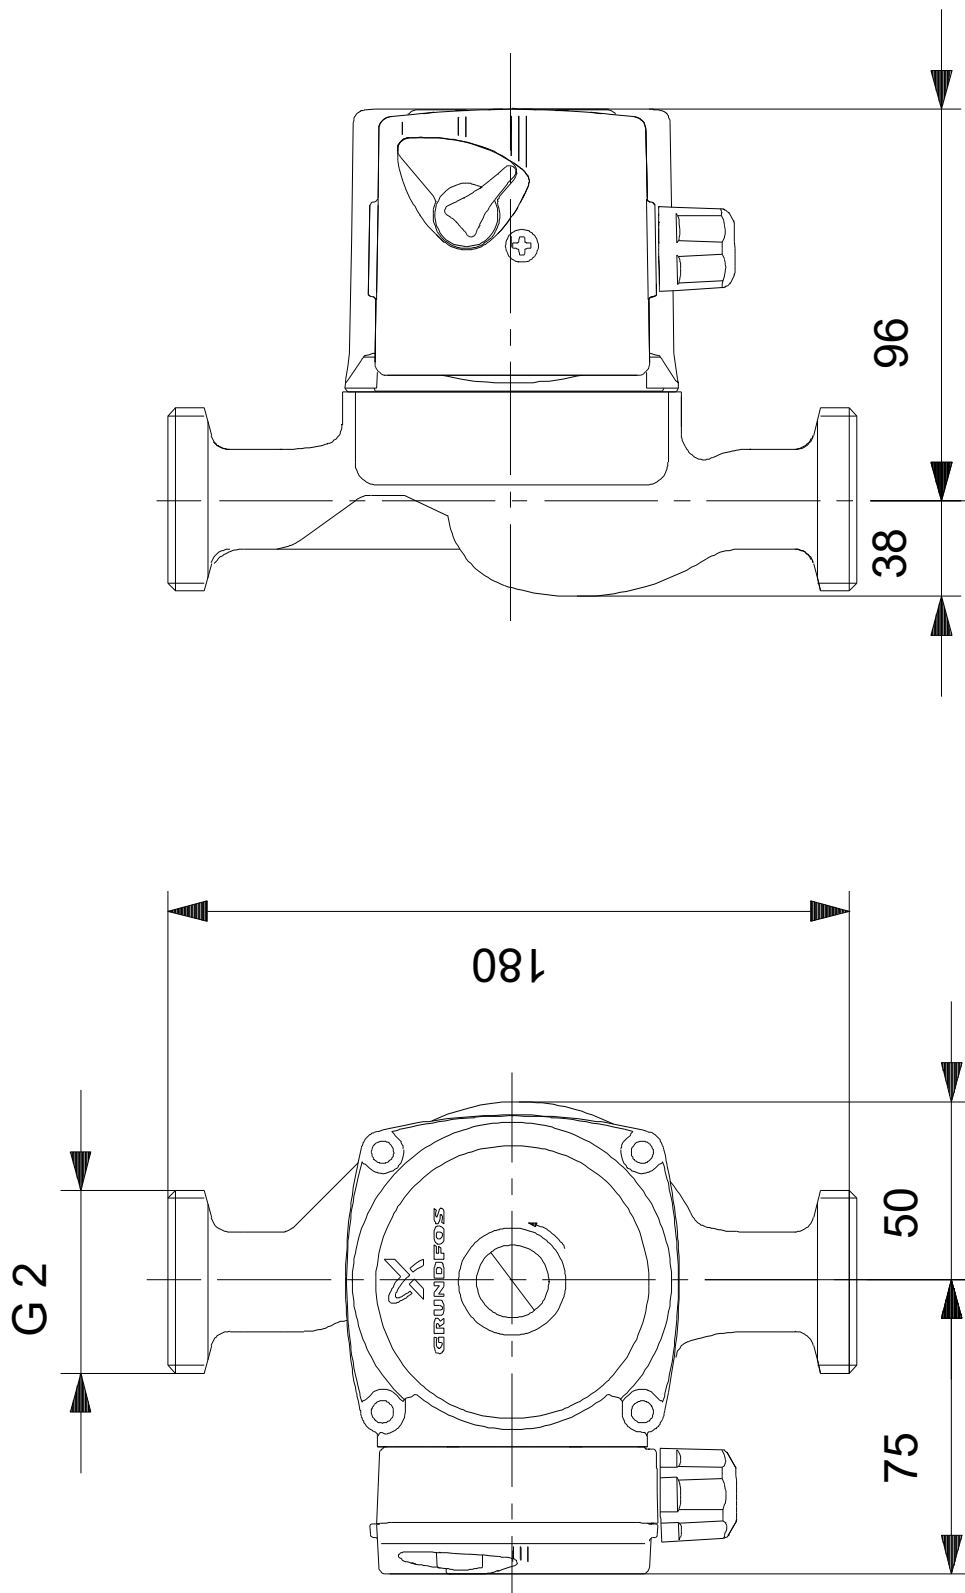

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.