

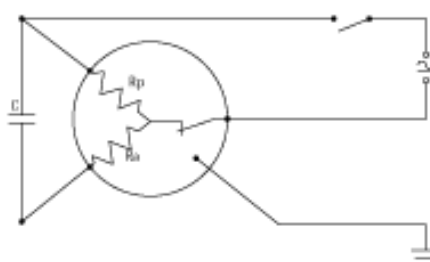
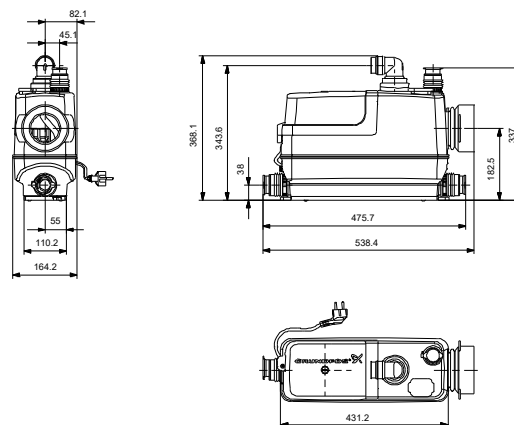
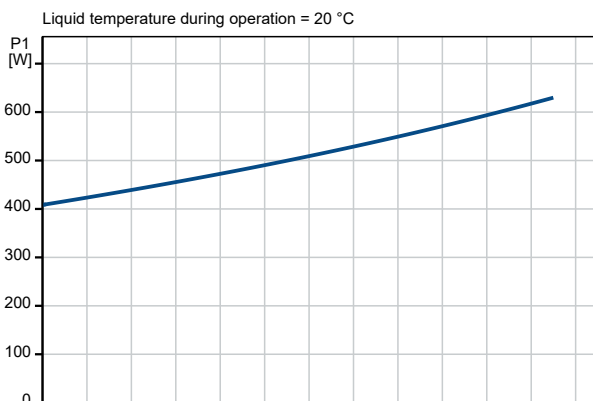


| Description                              | Value                      |
|------------------------------------------|----------------------------|
| <b>General information:</b>              |                            |
| Product name:                            | SOLOLIFT2 CWC-3            |
| Product No:                              | 97775331                   |
| EAN number:                              | 5710624187401              |
| <b>Technical:</b>                        |                            |
| Pump speed on which pump data are based: | 2800 rpm                   |
| Rated flow:                              | 1.32 l/s                   |
| Maximum flow:                            | 2.28 l/s                   |
| Rated head:                              | 5.88 m                     |
| Maximum head:                            | 8.5 m                      |
| Type of impeller:                        | VORTEX with GRINDER        |
| Max. Particle:                           | 25 mm                      |
| Approvals:                               | CE,CHROHS,MORO,UK CA       |
| Curve tolerance:                         | ISO9906:2012 3B            |
| <b>Materials:</b>                        |                            |
| Pump housing:                            | Composite                  |
| Impeller:                                | Polymer - PPE              |
| Tank:                                    | PLASTIC                    |
| Tank:                                    | PP                         |
| <b>Installation:</b>                     |                            |
| Range of ambient temperature:            | 0 .. 40 °C                 |
| Type of inlet connection:                | Smooth pipe                |
| Type of outlet connection:               | Smooth pipe                |
| Size of inlet connection:                | 32/36/40, 36/40/50, DN 100 |
| Size of outlet connection:               | 22/25/28/32/36/40          |
| Pressure rating for connection:          | PN 1,5                     |
| Number of leads:                         | 3X0,75MM2                  |
| <b>Liquid:</b>                           |                            |
| Liquid temperature range:                | 0 .. 50 °C                 |
| Selected liquid temperature:             | 20 °C                      |
| Density:                                 | 998.2 kg/m <sup>3</sup>    |
| <b>Electrical data:</b>                  |                            |
| Power input P1:                          | 620 W                      |
| Rated power - P2:                        | 0.42 kW                    |
| Mains frequency:                         | 50 Hz                      |
| Rated voltage:                           | 1 x 220-240 V              |
| Rated current:                           | 3 A                        |
| Cos phi - power factor:                  | 0.92                       |
| Number of poles:                         | 2                          |
| Enclosure class (IEC 34-5):              | IP44                       |
| Insulation class (IEC 85):               | F                          |
| Thermal protec:                          | THERMIK S06-150-05         |
| Power cable type:                        | H05VV-F-3G                 |
| Length of power cable:                   | 1.2 m                      |
| Power plug:                              | WITHOUT                    |
| <b>Tank:</b>                             |                            |
| Tank volume nominal:                     | 9 l                        |
| <b>Others:</b>                           |                            |
| Net weight:                              | 8.1 kg                     |
| Gross weight:                            | 9.69 kg                    |
| Shipping volume:                         | 0.045 m <sup>3</sup>       |
| Sales region:                            | Australia                  |
| Environmental approvals:                 | WEEE                       |

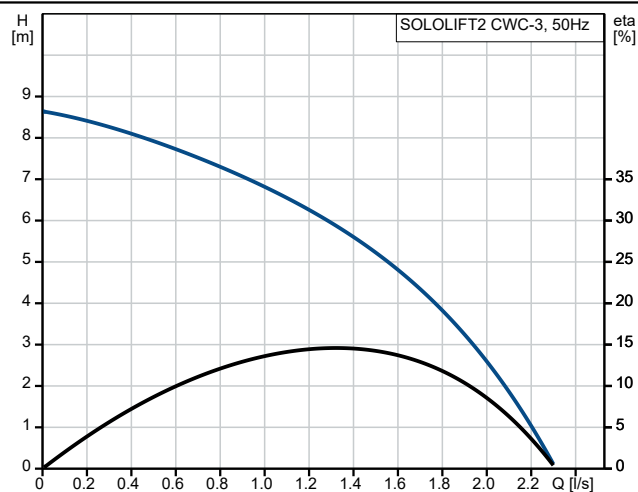

## 97775331 SOLOLIFT2 CWC-3 50 Hz

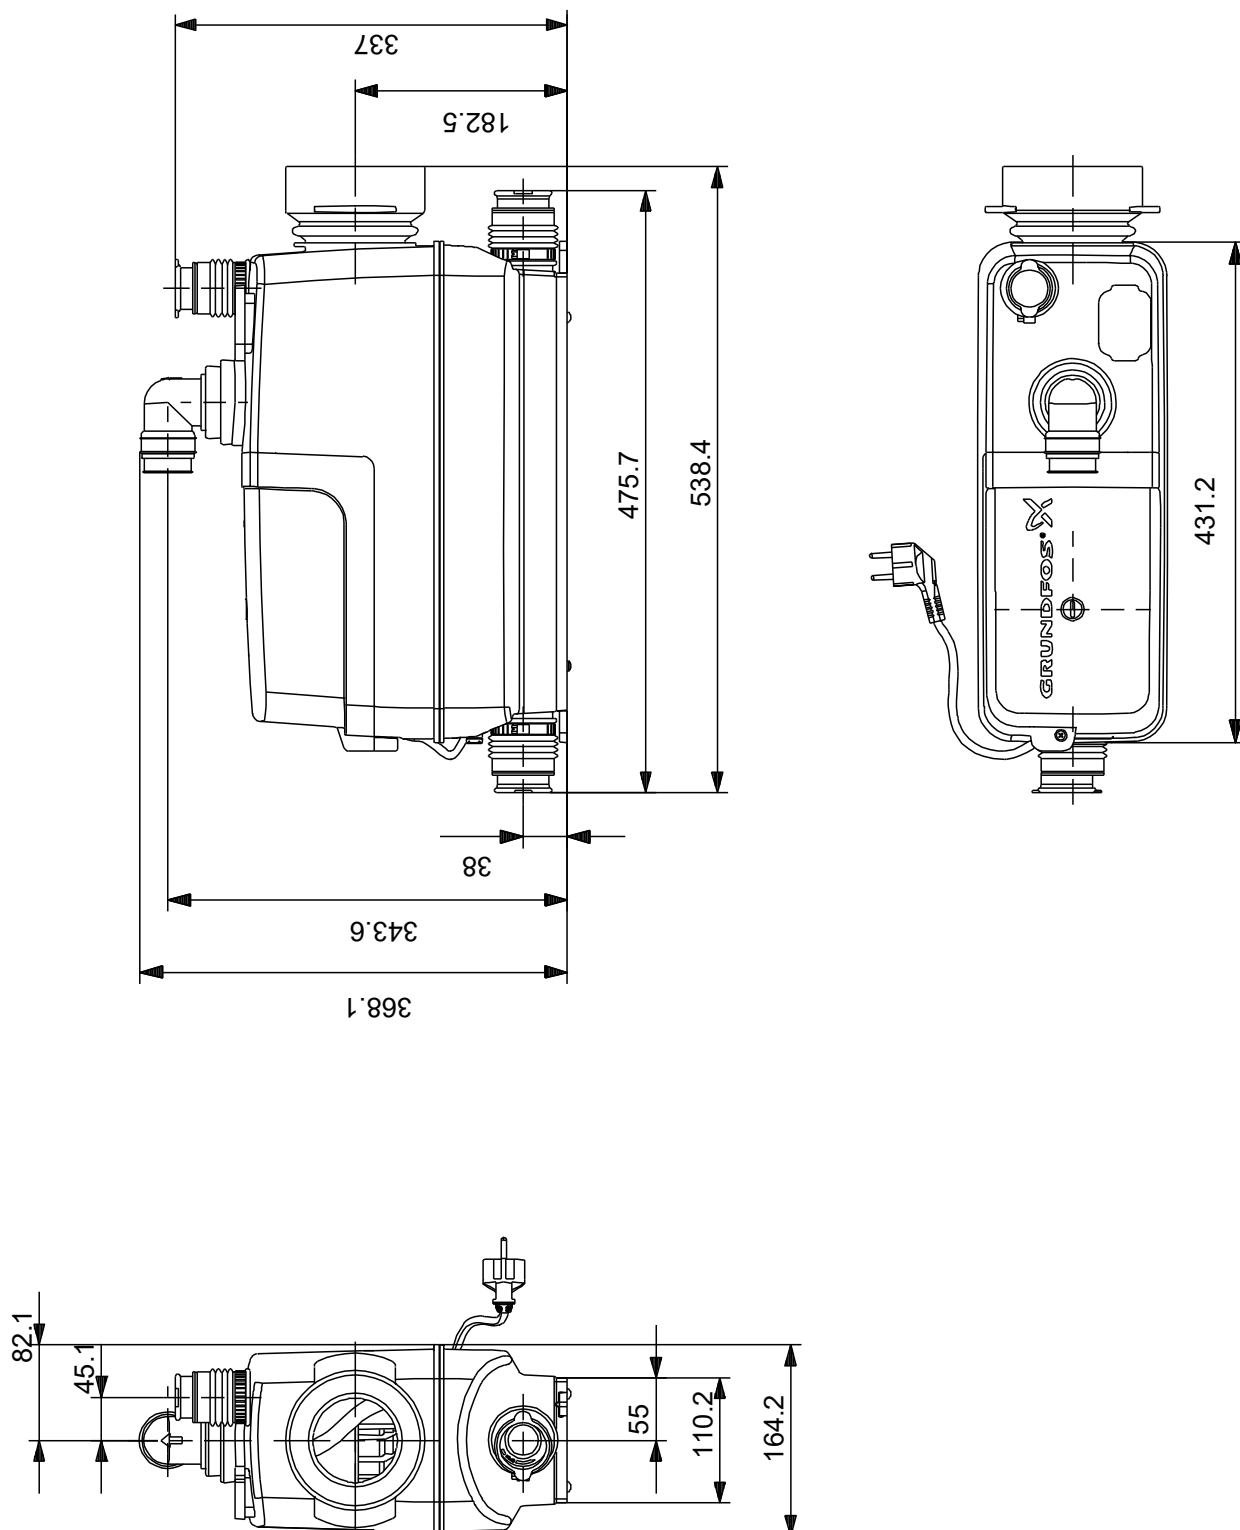

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.