



99132398 HYDRO MULTI-E 2 CRE 5-14

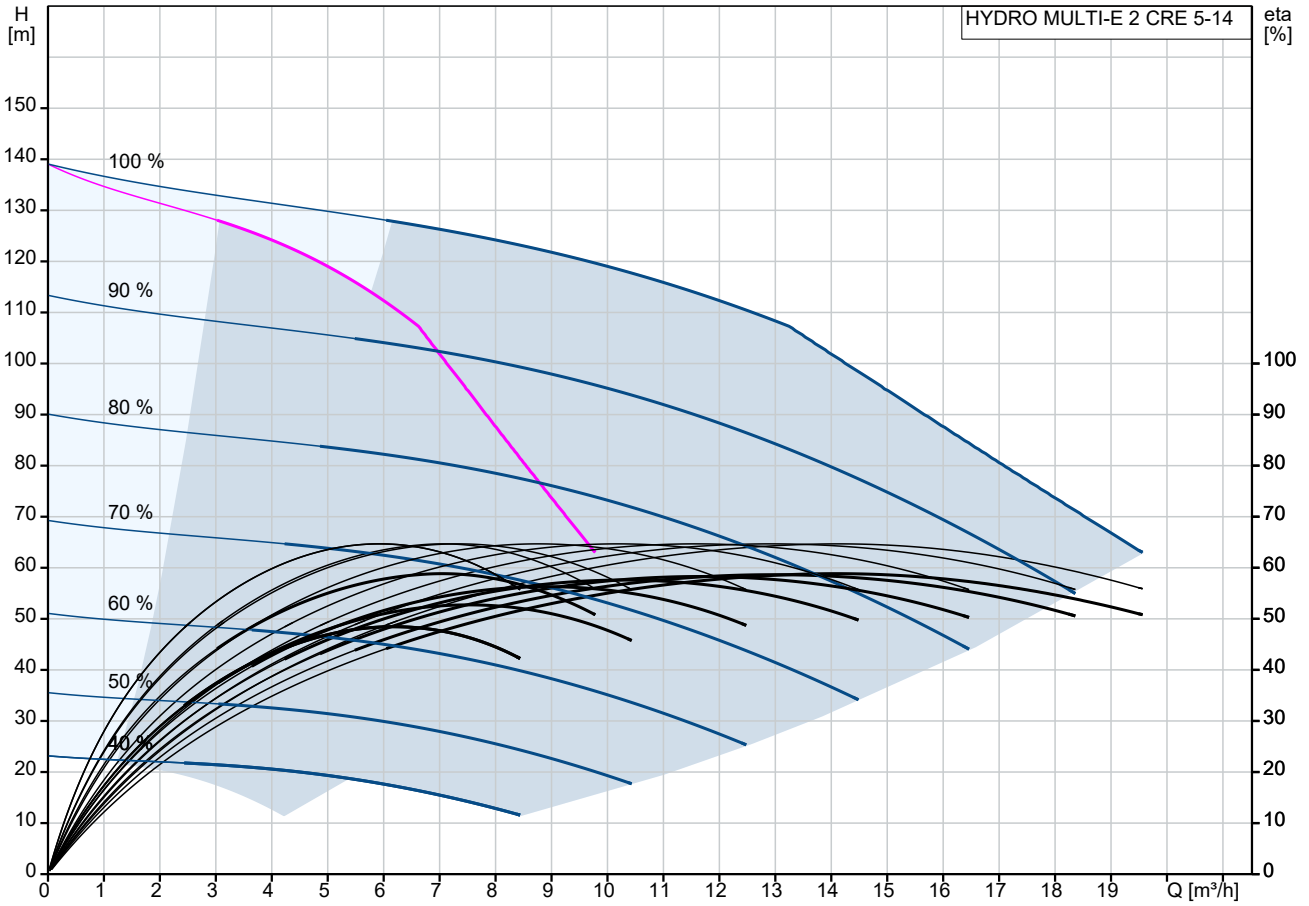

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

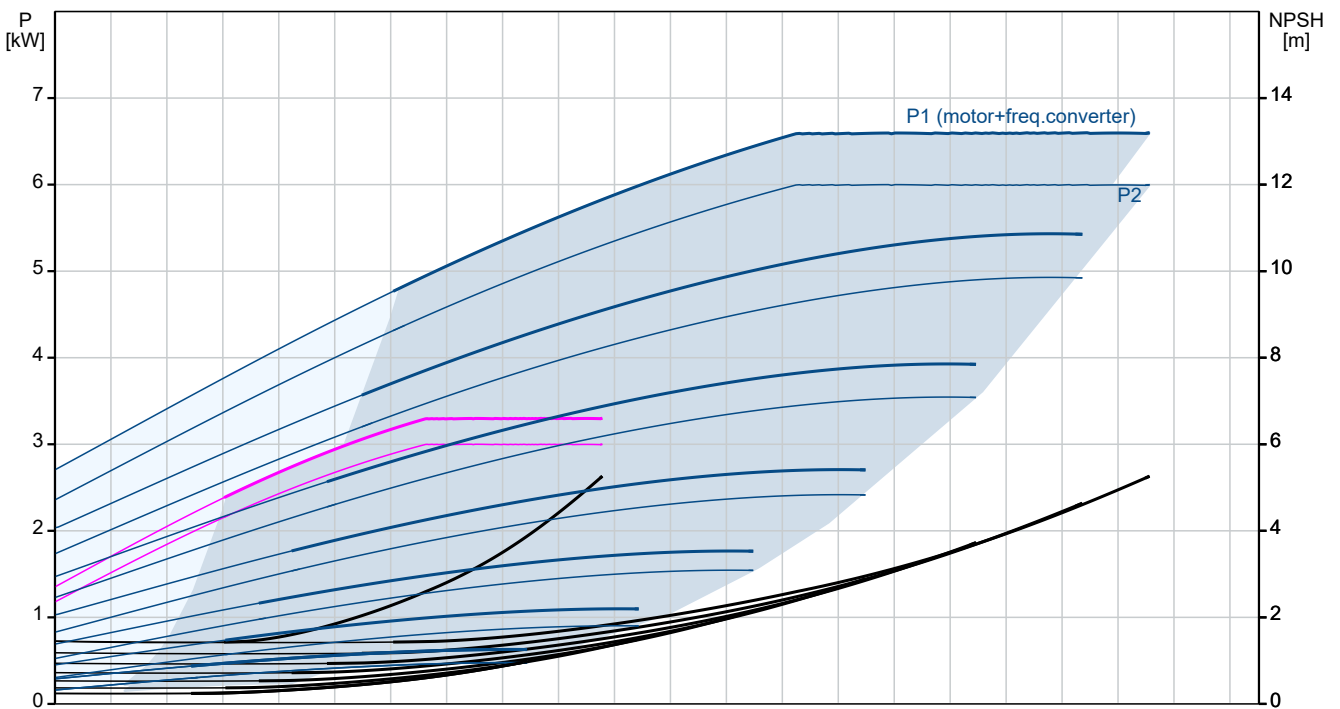

Description	Value
General information:	
Product name:	HYDRO MULTI-E 2 CRE 5-14
Product No:	99132398
EAN number:	5712607348205
Technical:	
Max flow:	20.4 m ³ /h
Min flow system:	3 m ³ /h
Head max:	138 m
Pump name:	CRE 5-14
Number of pumps:	2
Materials:	
Pump housing:	Cast iron
Manifolds:	Stainless steel
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	16 bar
Maximum permissible inlet pressure:	PN 16 bar
Flange standard:	
Flange standard:	DIN ISO 7/1
Manifold inlet:	R 2
Manifold outlet:	R 2
Earth connection:	PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power (P2) main pump:	3 kW
Mains frequency:	50 / 60 Hz
Rated voltage:	3 x 380-415 V
Rated current:	11.6 A
IE Efficiency class:	IE5
Start. method:	E
Enclosure class (IEC 34-5):	IP54
Tank:	
Volume of pressure tank:	12 l
Diaphragm tank:	Y
Others:	
Net weight:	123 kg
Gross weight:	165 kg
Shipping volume:	0.631 m ³
Language:	MULTI

