




91048659 HYDRO MULTI-S 2 CM 3-3 50 Hz

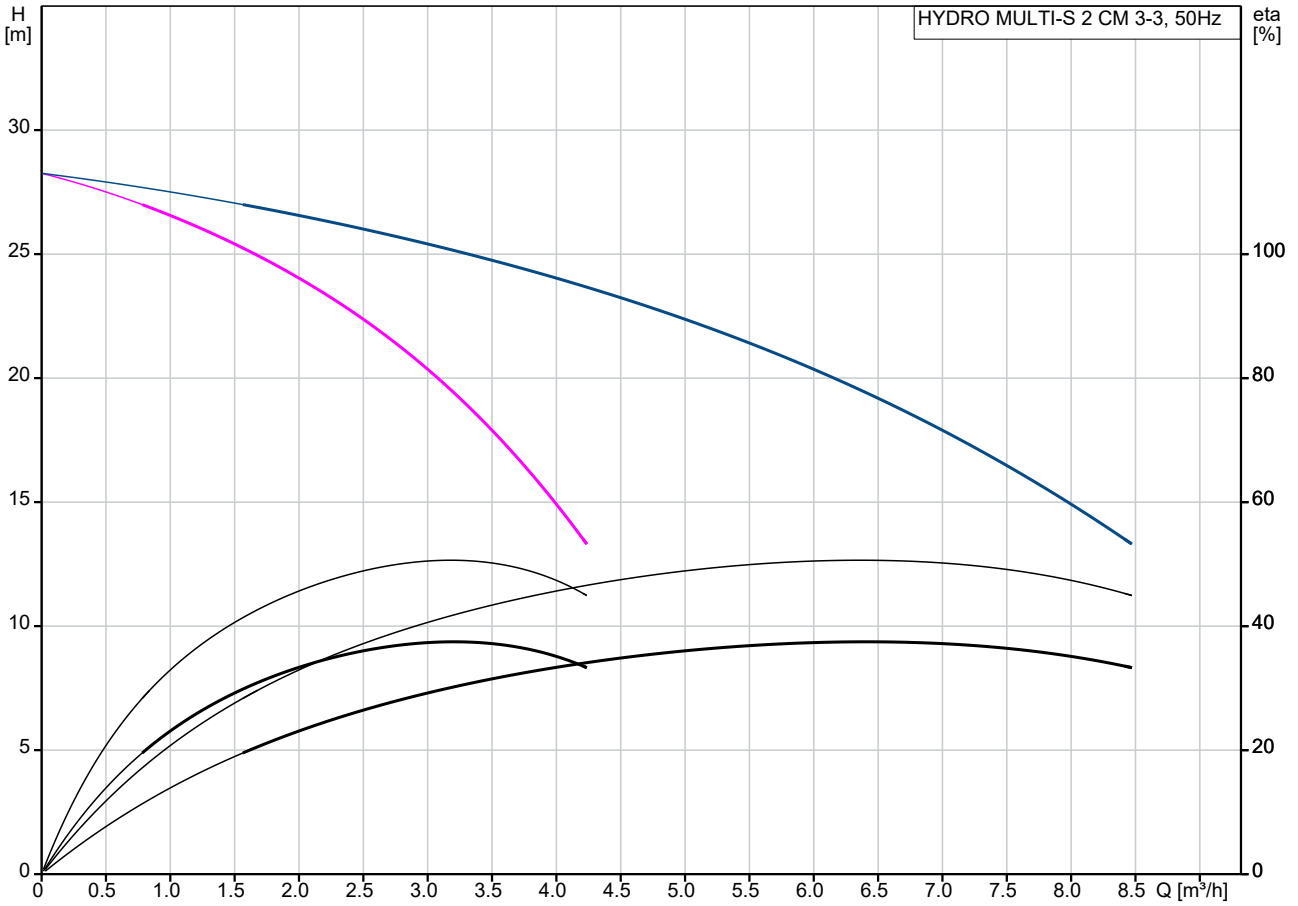




Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

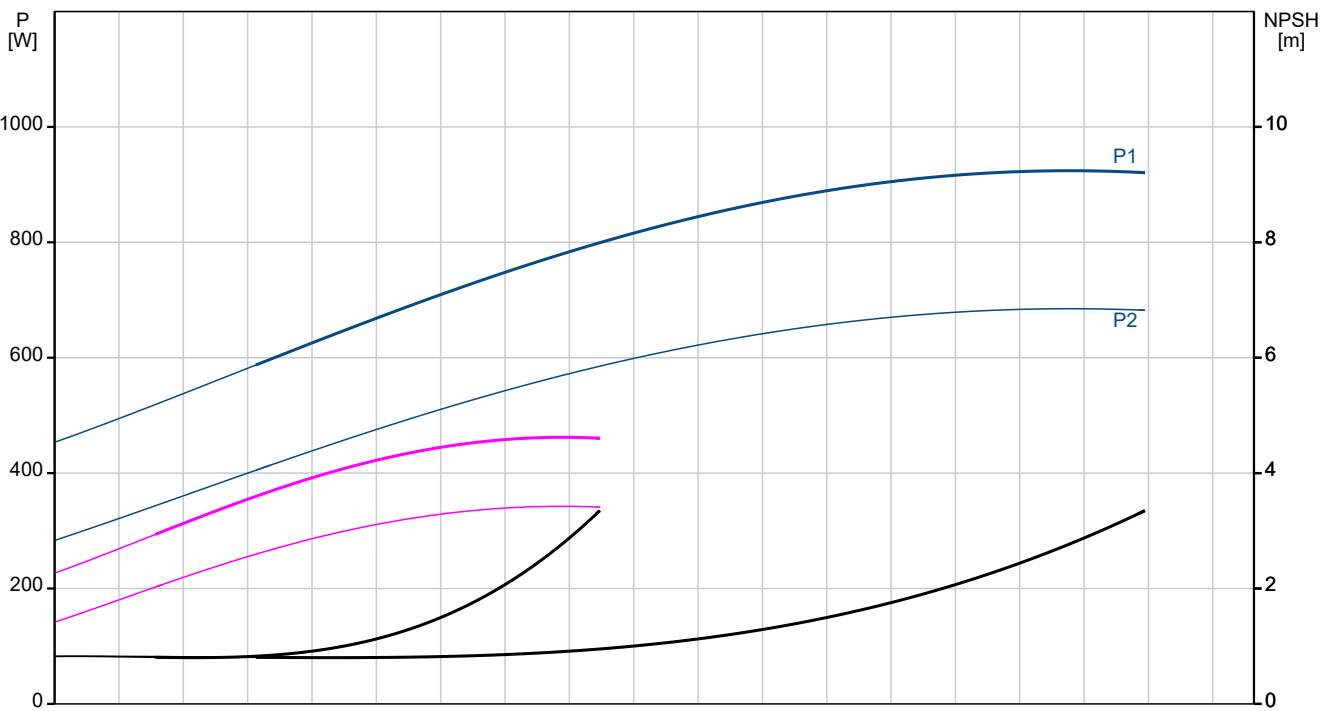

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CM 3-3
Product No:	91048659
EAN number:	5712607681647
Technical:	
Rated flow:	6 m ³ /h
Maximum flow:	8.6 m ³ /h
Min flow system:	0.8 m ³ /h
Max flow system:	8.6 m ³ /h
Rated head:	21 m
Maximum head:	27 m
Approvals:	CE
Pump name:	CM3-3
Model:	B
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-200
Pump housing:	ASTM A48-25A
Manifold:	Stainless steel
Base:	Steel
Base:	EN 1.0533
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	1 1/2"
Earth connection:	PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Rated power - P2:	0.46 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240/380-415 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	44 kg
Gross weight:	49 kg
Shipping volume:	1.15 m ³
Language:	F
Sales region:	France

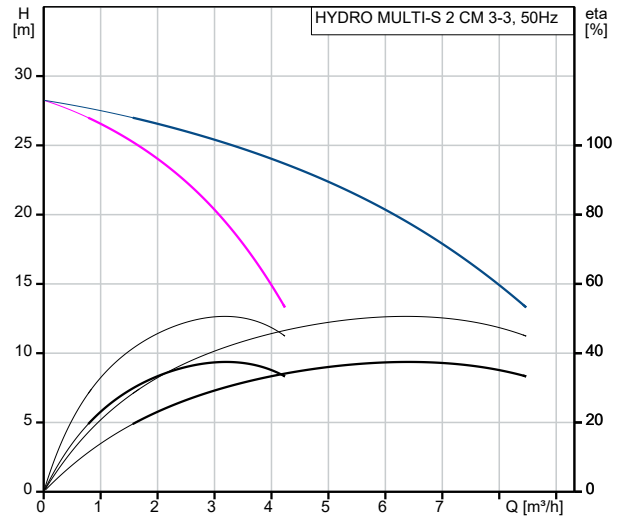

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

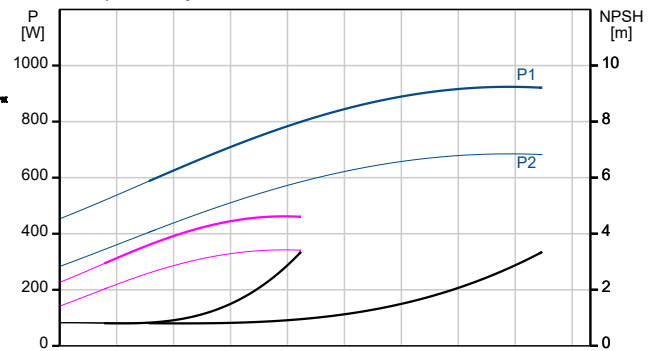



Company name:

Created by:

Phone:

Date:

19/07/2024

91048659 HYDRO MULTI-S 2 CM 3-3 50 Hz

