
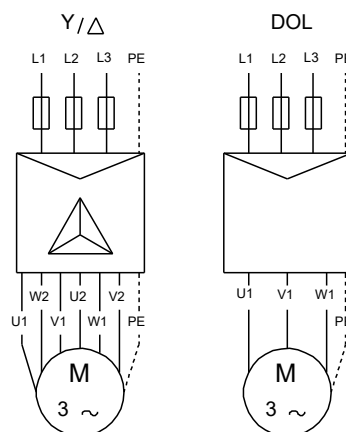


Description	Value
General information:	
Product name:	MS6000REST40
Product No:	78195612
EAN number:	5700390621247
Technical:	
Shaft seal for motor:	SIC/SICFKM
Approvals:	CE,GOST2
CE approved (Yes/No):	Y
Model:	C
Motor version:	T40
Materials:	
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4539
Motor:	AISI 904L
Installation:	
Maximum ambient pressure:	60 bar
Motor diameter:	6 inch
Staybolt:	1/2-20 UNF
Liquid:	
Max liquid t at 0.15 m/sec:	40 °C
Electrical data:	
Motor type:	MS6000
Rated power - P2:	7.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400-415 V
Voltage tolerance:	+6/-10 %
Rated current:	17.8-17.2-17.2 A
Starting current:	460-510-530 %
Cos phi - power factor:	0.84-0.82-0.79
Rated speed:	2850-2870-2880 rpm
Rated full-load torque:	25 Nm
Locked-rotor torque:	140-160-180 %
Breakdown torque:	230-260-280 %
Moment of inertia:	0.0044 kg m ²
Axial load max:	7.5 kN
Start. method:	DOL
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	EXT.
Built-in temp. transmitter:	Y
Winding resistance:	1.833 ohm
Windings:	Enamelled
Others:	
Net weight:	38 kg

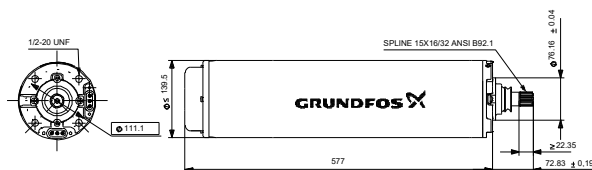

U1, W2	Brown
V1, U2	Black
W1, V2	Grey