




91048633 HYDRO MULTI-S 2 CM3-5 50 Hz

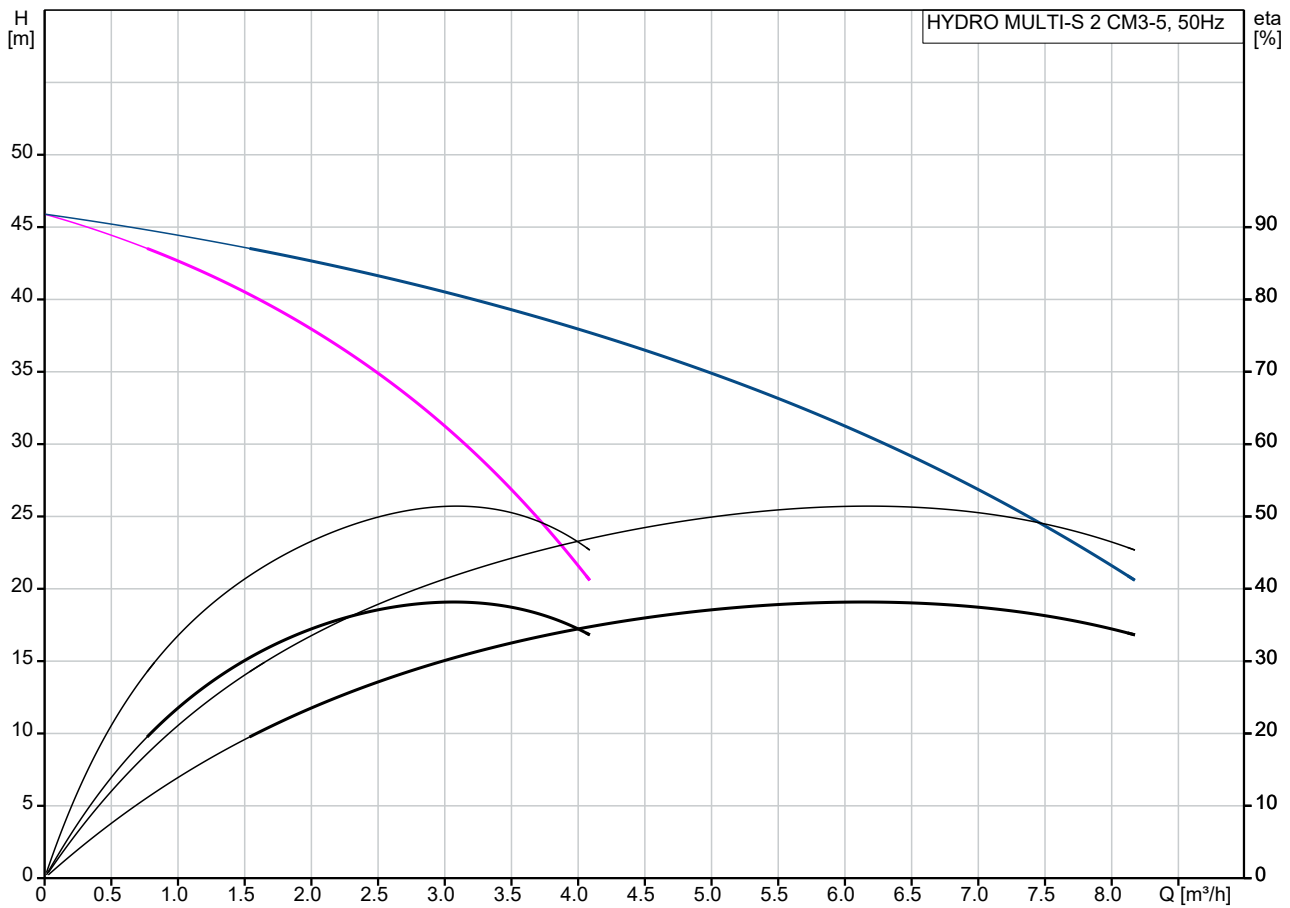




Losses in fittings and valves not included
Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

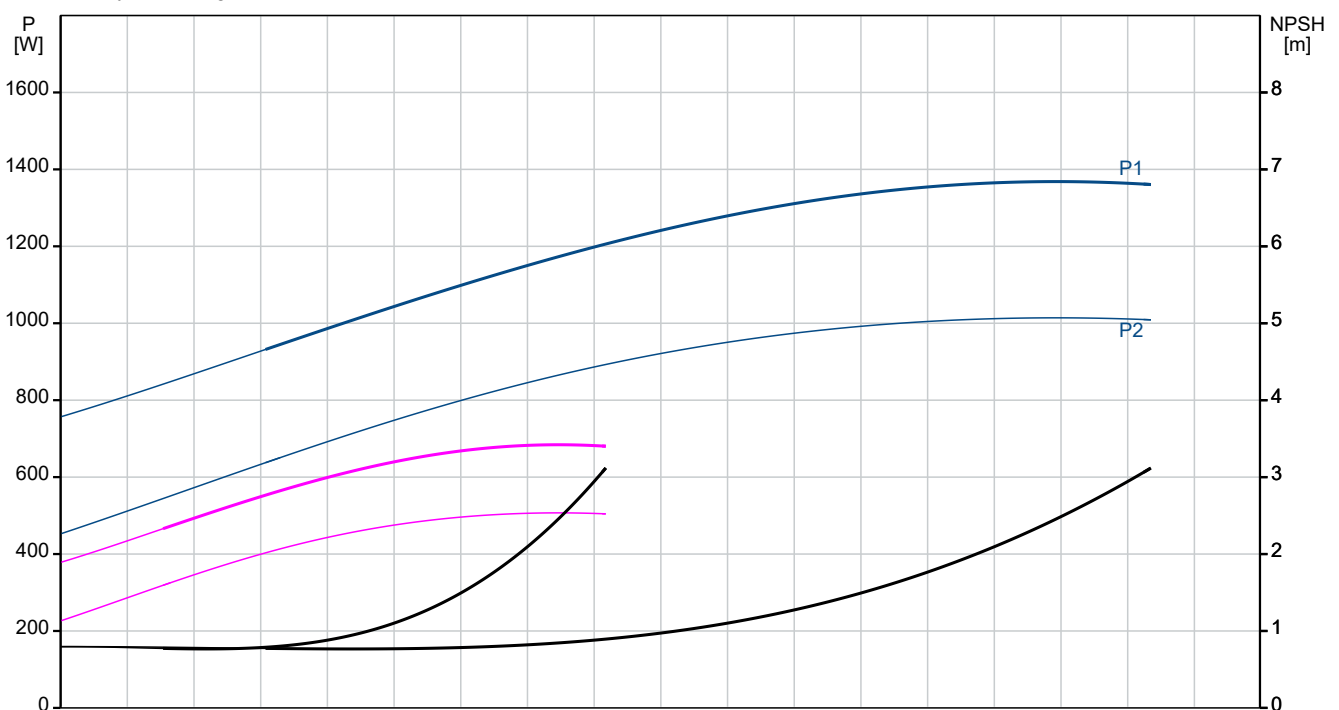

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CM3-5
Product No:	91048633
EAN number:	5712607681388
Technical:	
Min flow system:	0.8 m³/h
Max flow system:	8.6 m³/h
Maximum head:	36.7 m
Approvals:	CE
Pump name:	CM3-5
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Manifold:	Stainless steel
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	1.5
Earth connection:	N, PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	47 kg
Gross weight:	52 kg
Language:	F
Sales region:	France

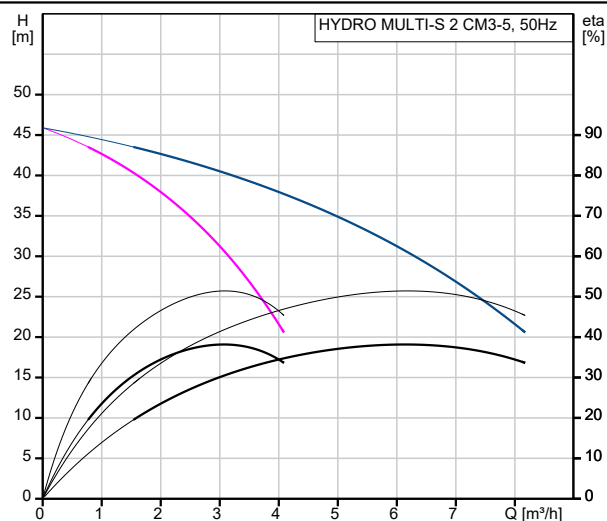

Losses in fittings and valves not included
Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

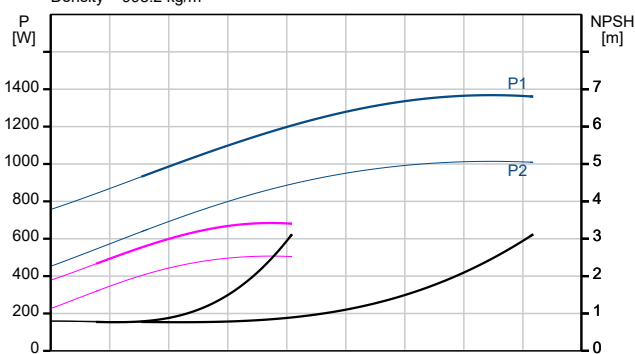

91048633 HYDRO MULTI-S 2 CM3-5 50 Hz

