



Company name:


Created by:

Phone:


Date:

19/07/2024


91048703 HYDRO MULTI-S 2 CM5-6 50 Hz

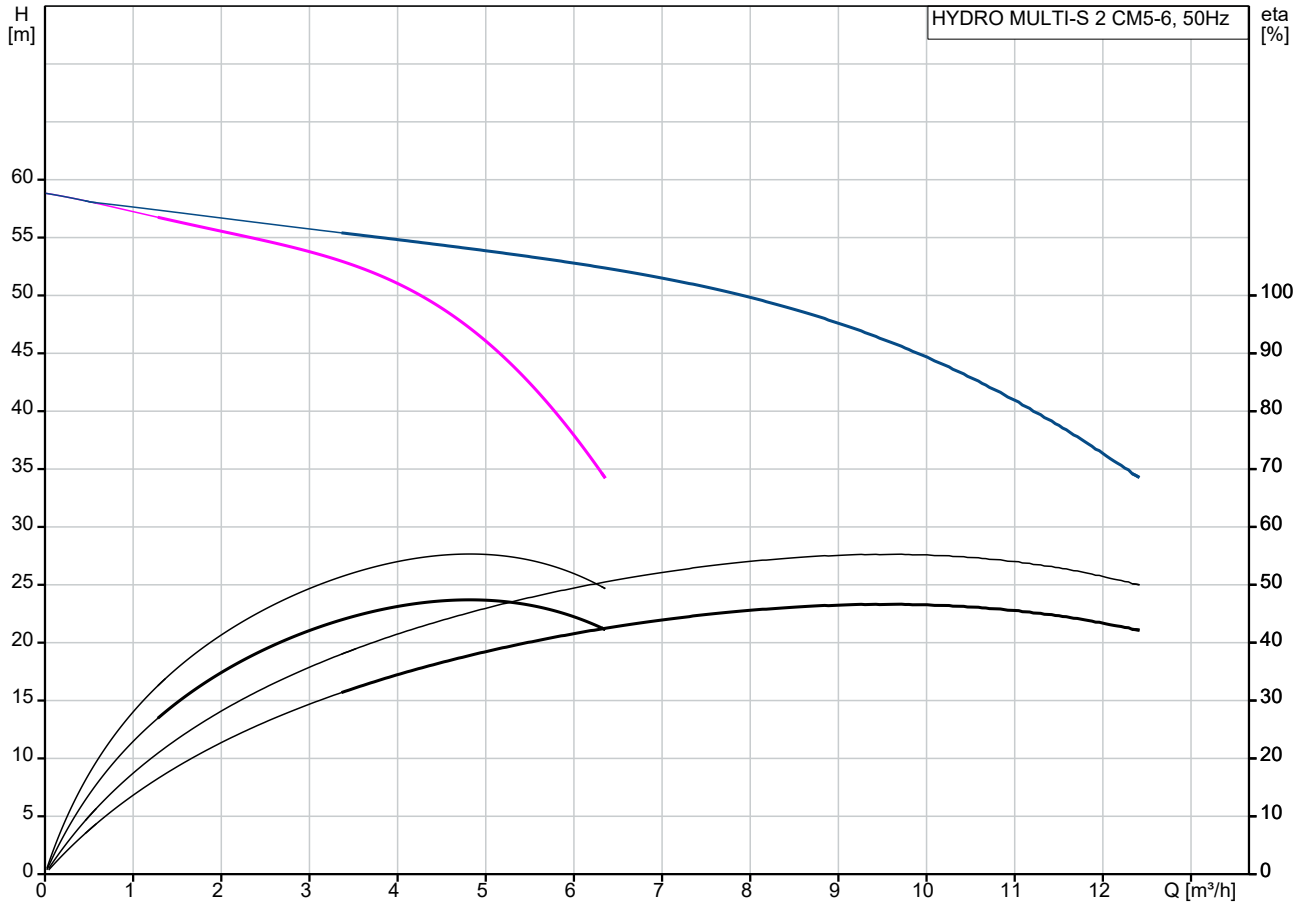

Losses in fittings and valves not included
Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

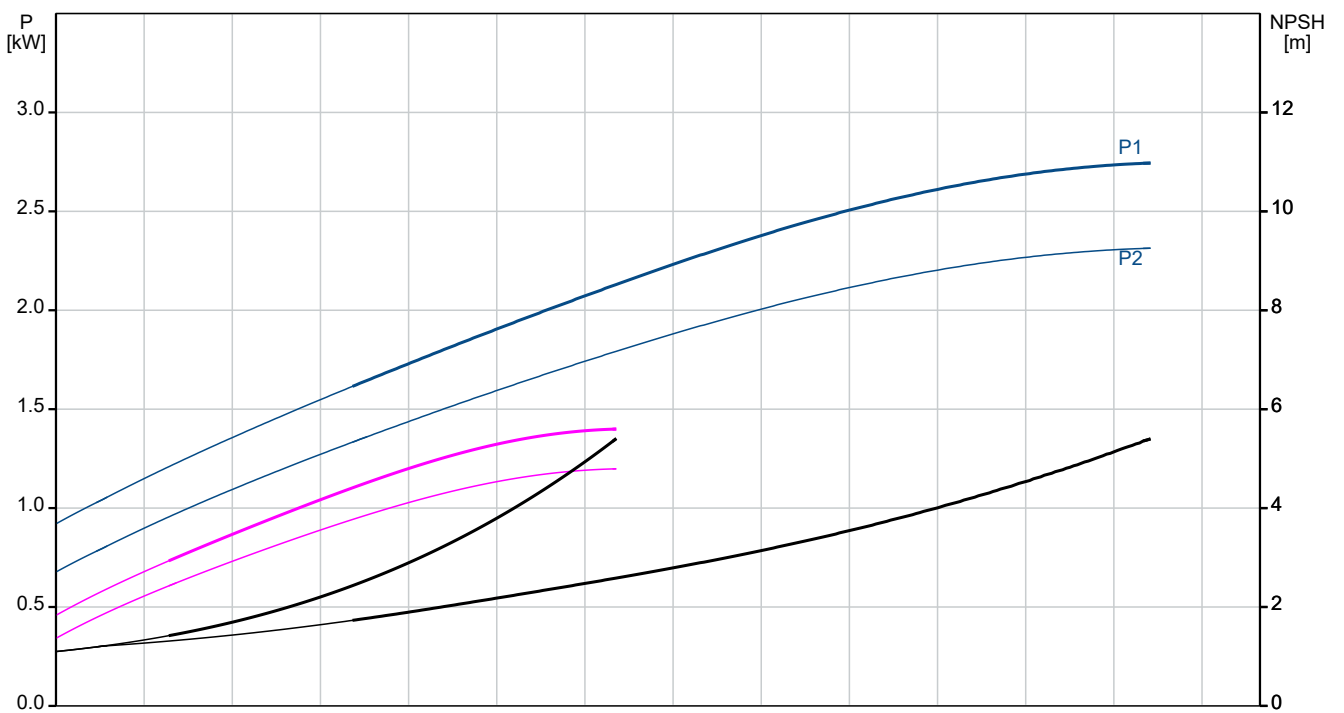

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CM5-6
Product No:	91048703
EAN number:	5712607682088
Technical:	
Min flow system:	1.3 m ³ /h
Max flow system:	12.6 m ³ /h
Maximum head:	46.4 m
Approvals:	CE
Pump name:	CM5-6
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Manifold:	Stainless steel
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	2
Earth connection:	PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240/380-415 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	100 kg
Gross weight:	59 kg
Language:	F
Sales region:	France

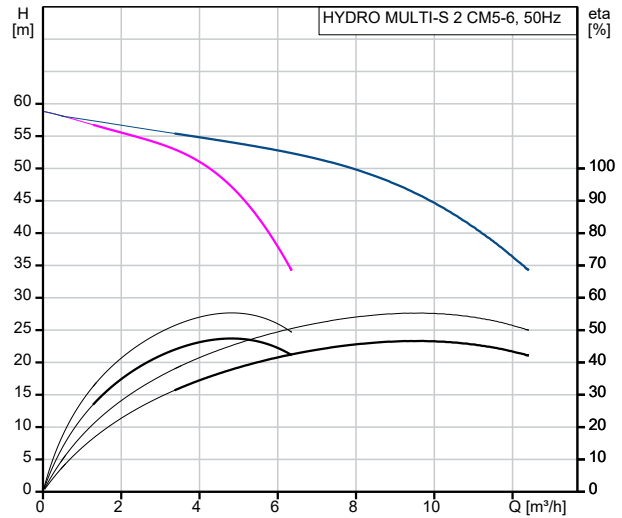

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

