



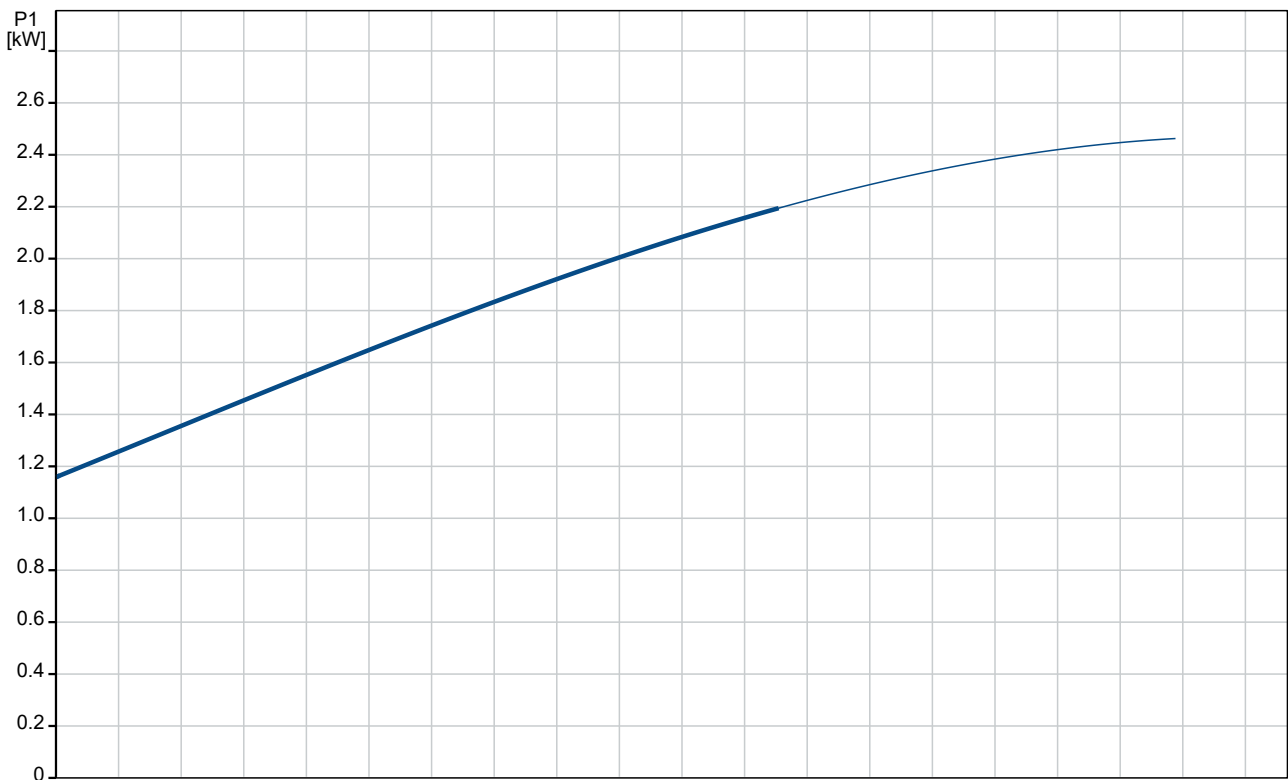

Company name:
Created by:
Phone:

Date: 17/07/2024

96004609 UNILIFT AP50B.50.15.3V 50 Hz

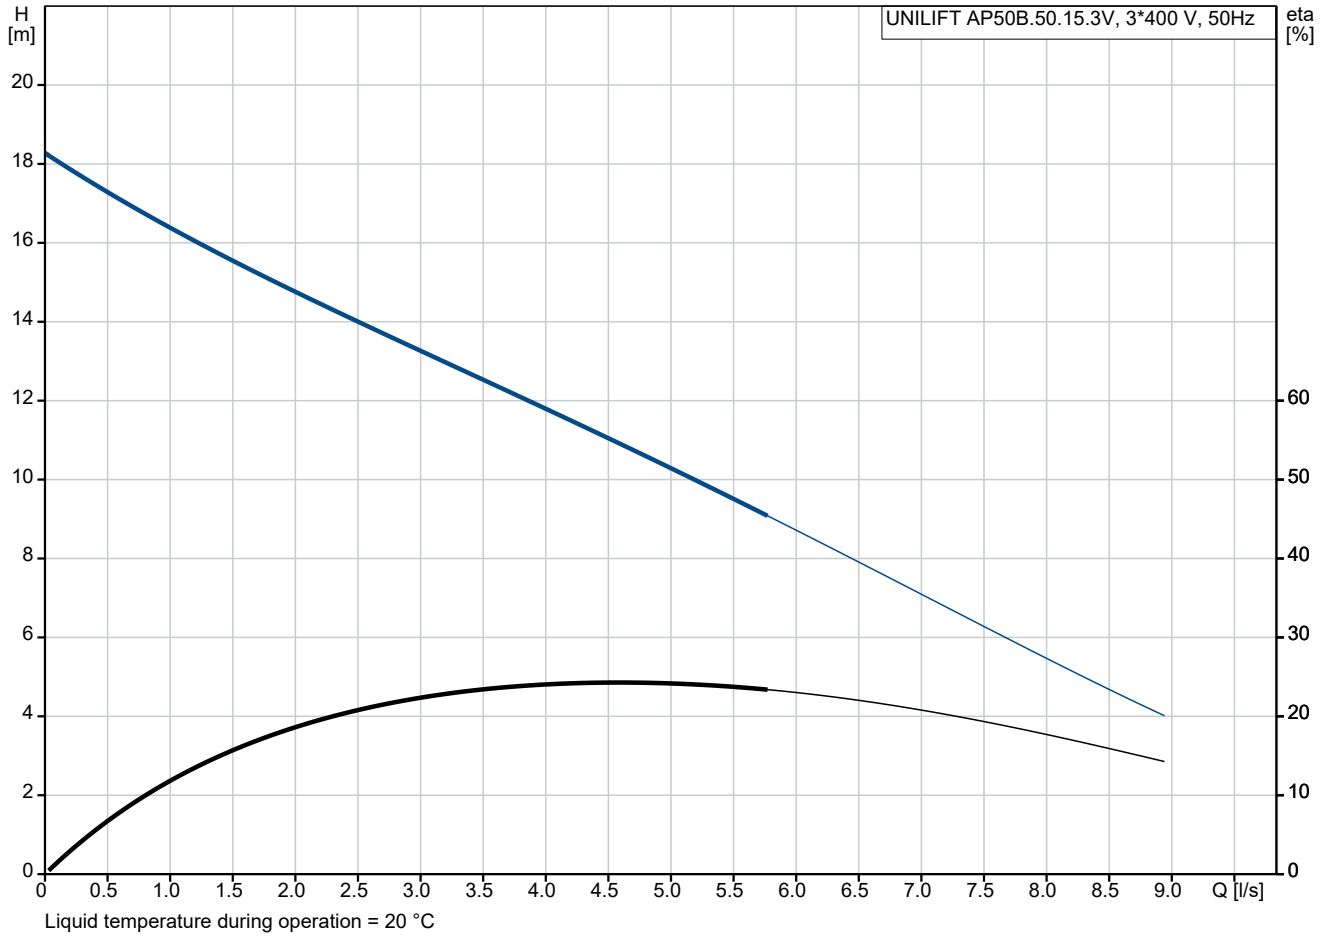

Description	Value
General information:	
Product name:	UNILIFT AP50B.50.15.3V
Product No:	96004609
EAN number:	5700392895561
Technical:	
Maximum flow:	8.61 l/s
Maximum head:	17 m
Type of impeller:	VORTEX
Max. Particle:	50 mm
Approvals:	CE,RCM,VDE,LGABG,EAC,MORO,UKCA,CNROHSEXP,SEPRO
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	Rp
Size of connection:	2 inch
Maximum installation depth:	2 m
Inst dry/wet:	S
Installation:	H/V
Auto-coupling:	Y
Place of installation:	Indoor
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input P1:	2.15 kW
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	3.7 A
Cos phi - power factor:	0.85
Rated speed:	2785 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	EXT.
Length of power cable:	5 m
Type of cable plug:	NONE
Others:	
Net weight:	11.5 kg
Gross weight:	11.9 kg
Danish VVS No.:	391273152
Swedish RSK No.:	5885931
Finnish LVI No.:	4822595
Environmental approvals:	WEEE

