

Qty. Description

1 UPS 80-120/2 F 360



Note! Product picture may differ from actual product

Product No.: [96402441](#)

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible.

The pump is characterized by:

- * 3 speed motor.
- * Ceramic radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can, bearing plate and rotor cladding.
- * Aluminium alloy stator housing.
- * Cast iron pump housing.
- * Stator with built-in thermal switch.

The motor is a 3-phase motor.

The pump is supplied with a standard module in the terminal box.

The standard module is to be connected to the mains supply via external contactor.

Controls:

Relay: N

Liquid:

Pumped liquid: Water

Liquid temperature range: -10 .. 120 °C

Selected liquid temperature: 60 °C

Density: 983.2 kg/m³

Technical:

Rated flow: 40.6 m³/h

Rated head: 7.37 m

Approvals: AAA, EAC


Materials:

Pump housing: Cast iron
EN 1561 EN-GJL-250
35 B - 40 B


Impeller: Stainless steel
EN 1.4301

Qty.	Description
1	304 Installation: Range of ambient temperature: 0 .. 40 °C Maximum operating pressure: 10 bar Type of connection: DIN Size of connection: DN 80 Pressure rating for connection: PN 10 Port-to-port length: 360 mm Electrical data: Power input in speed 1: 1000 W Power input in speed 2: 1100 W Max. power input: 1500 W Mains frequency: 50 Hz Rated voltage: 3 x 400-415 V Current in speed 1: 1.65 A Current in speed 2: 1.8 A Current in speed 3: 2.75 A Cos phi in speed 1: 0.87 Cos phi in speed 2: 0.88 Cos phi: 0.79 Number of poles: 2 Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): H Built-in motor protection: CONTACT Others: Terminal box position: 1.30H Net weight: 36.5 kg Gross weight: 38.4 kg Shipping volume: 0.061 m³ Danish VVS No.: 380745014 Norwegian NRF no.: 9042454


96402441 UPS 80-120/2 F 360 50 Hz

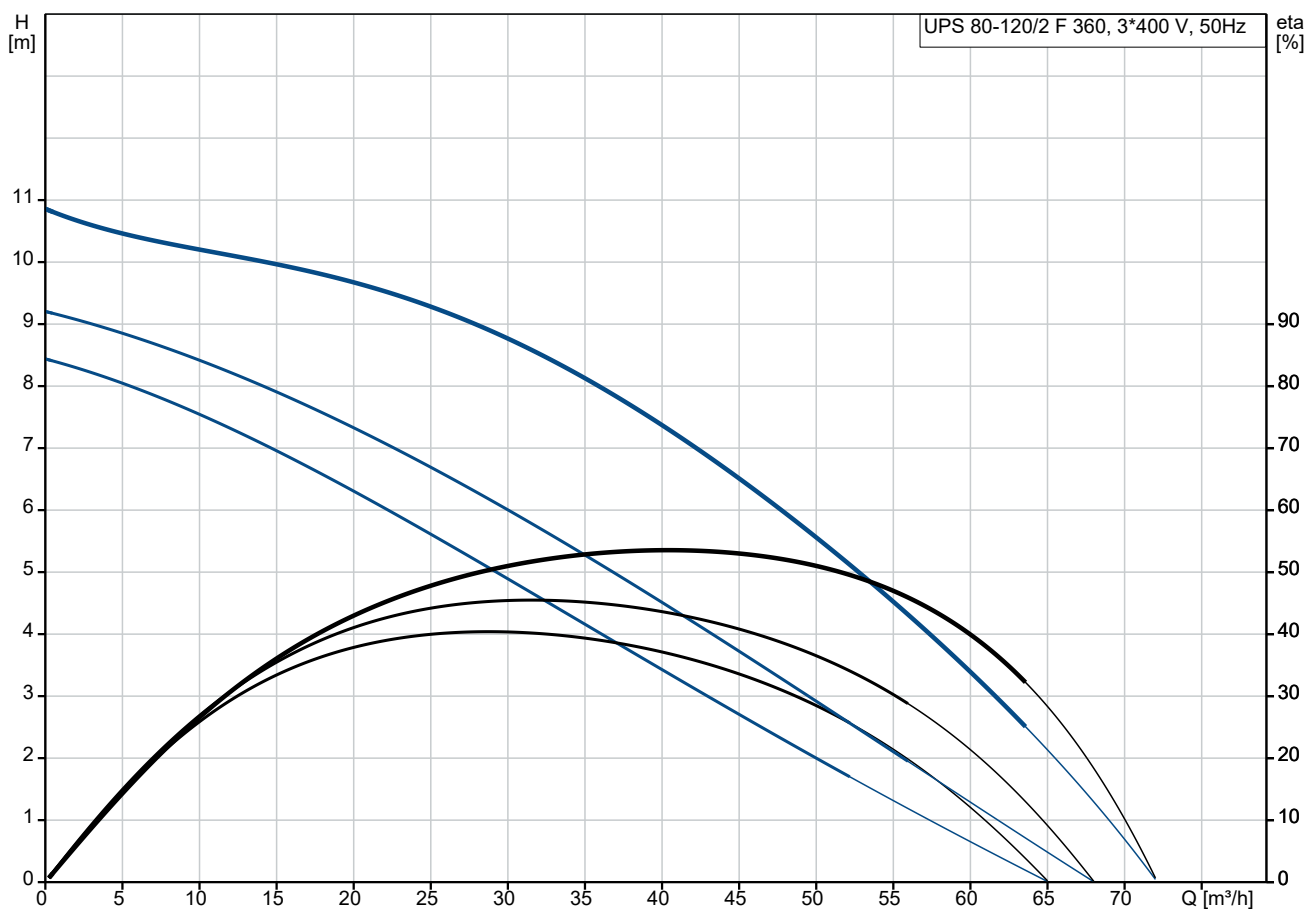




Pumped liquid = Water
 Liquid temperature during operation = 60 °C
 Density = 983.2 kg/m³

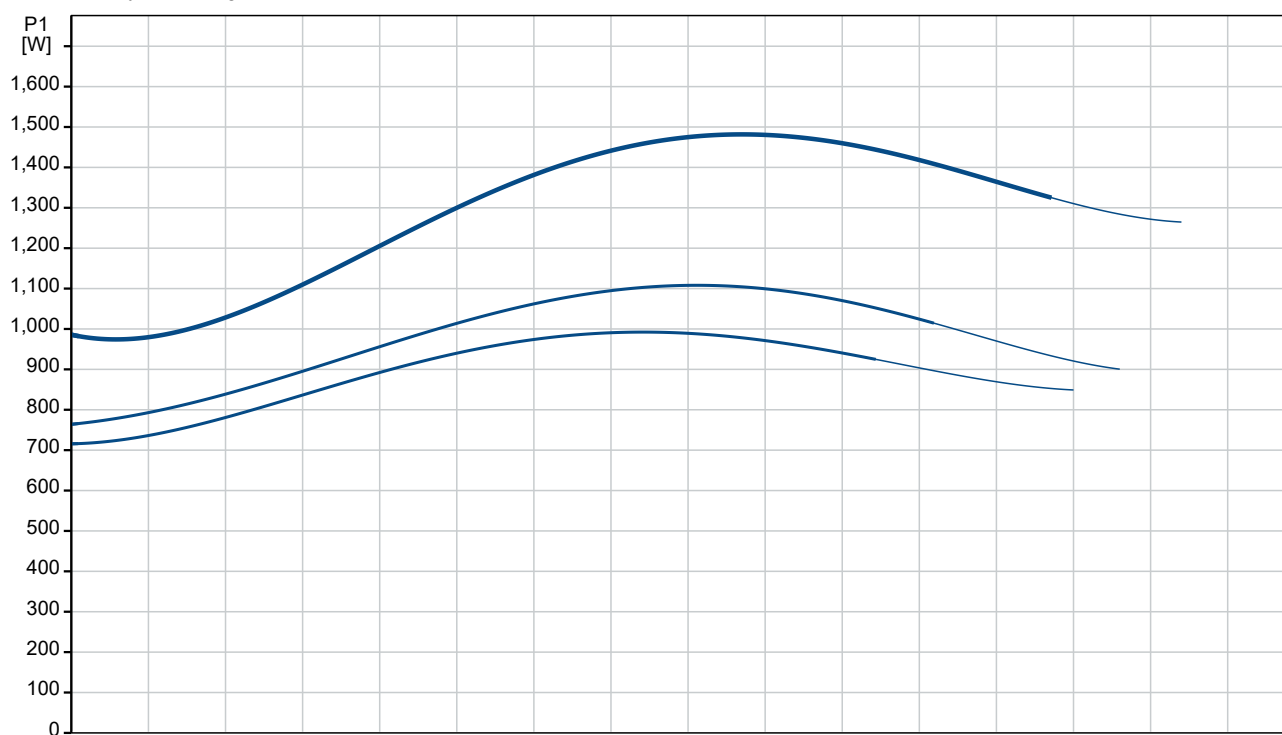





Description	Value
General information:	
Product name:	UPS 80-120/2 F 360
Product No:	96402441
EAN number:	5708601059018
Technical:	
Speed no:	3
Rated flow:	40.6 m³/h
Rated head:	7.37 m
Maximum head:	120 dm
Approvals:	AAA,EAC
Model:	C
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-250
Pump housing:	35 B - 40 B
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Type of connection:	DIN
Size of connection:	DN 80
Pressure rating for connection:	PN 10
Port-to-port length:	360 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 120 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Power input in speed 1:	1000 W
Power input in speed 2:	1100 W
Max. power input:	1500 W
Mains frequency:	50 Hz
Rated voltage:	3 x 400-415 V
Current in speed 1:	1.65 A
Current in speed 2:	1.8 A
Current in speed 3:	2.75 A
Cos phi in speed 1:	0.87
Cos phi in speed 2:	0.88
Cos phi:	0.79
Number of poles:	2
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Built-in motor protection:	CONTACT
Thermal protec:	EXT.
Controls:	
Relay:	N
Others:	
Terminal box position:	1.30H
Net weight:	36.5 kg
Gross weight:	38.4 kg
Shipping volume:	0.061 m³
Danish VVS No.:	380745014
Norwegian NRF no.:	9042454

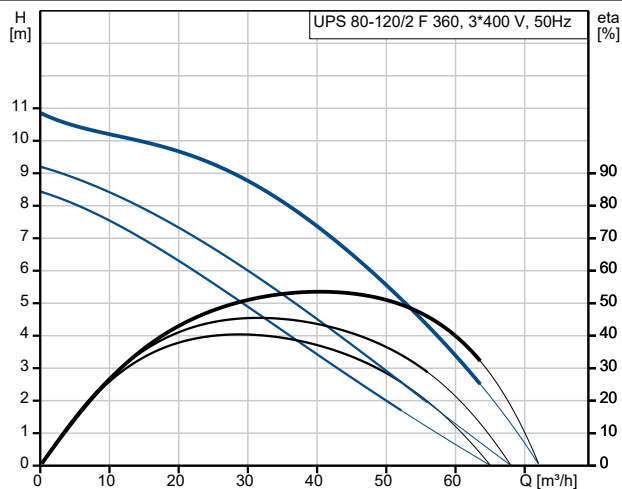

Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

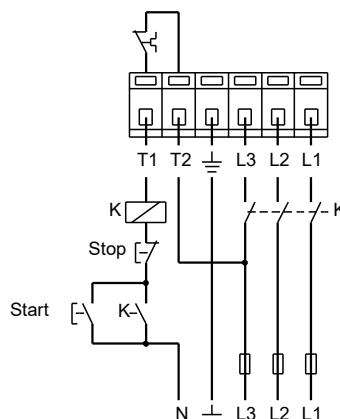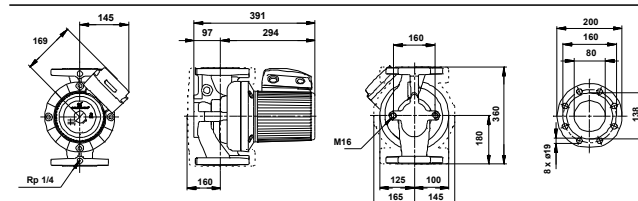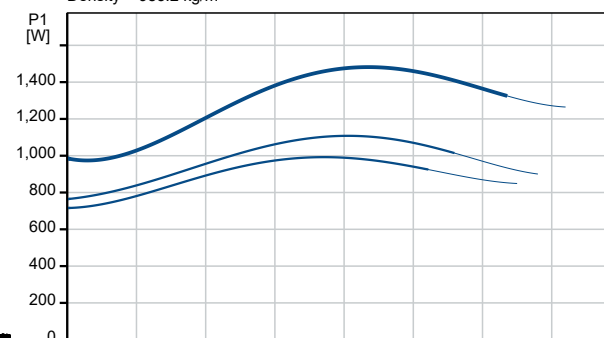

96402441 UPS 80-120/2 F 360 50 Hz

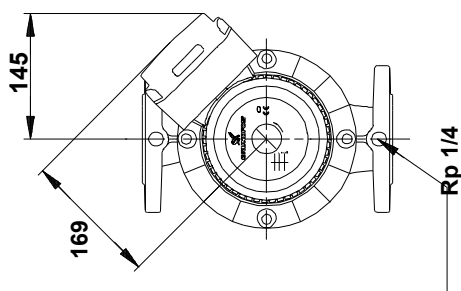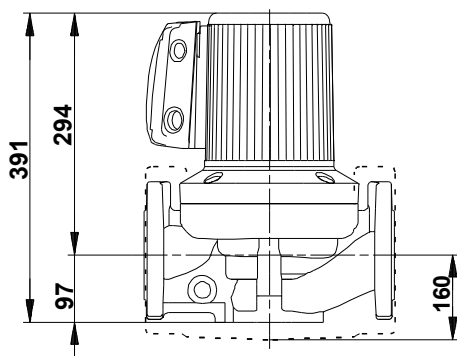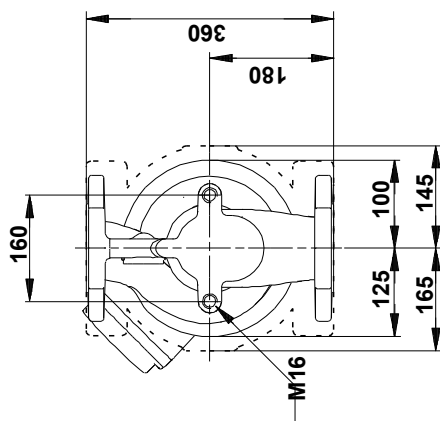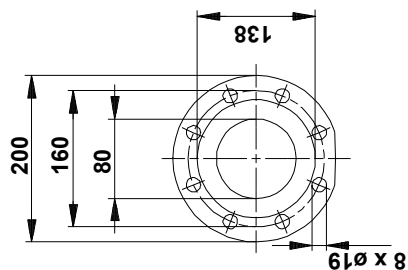

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.