

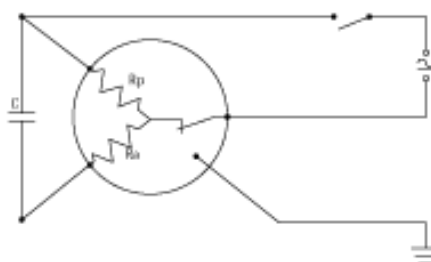
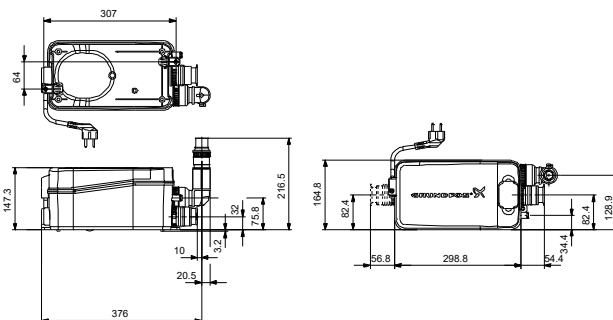
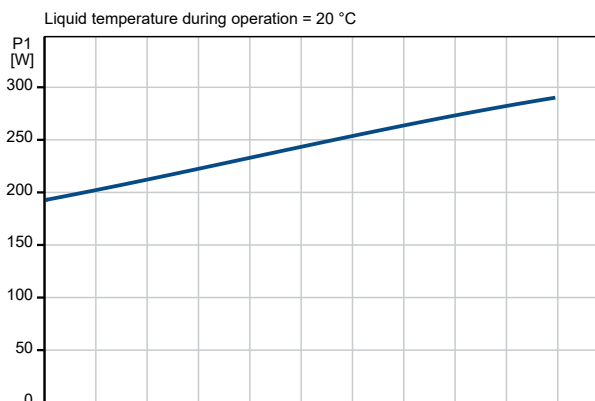


Description	Value
General information:	
Product name:	SOLOLIFT2 D-2
Product No:	97775318
EAN number:	5710624187272
Technical:	
Pump speed on which pump data are based:	2800 rpm
Rated flow:	1.06 l/s
Maximum flow:	1.98 l/s
Rated head:	3.26 m
Maximum head:	5.5 m
Type of impeller:	VORTEX
Max. Particle:	10 mm
Approvals:	CE,SEPRO,CHROHS,MOR O,AAA
Curve tolerance:	ISO9906:2012 3B
Materials:	
Pump housing:	Composite
Impeller:	Polymer - PA
Tank:	PLASTIC
Tank:	PP
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of inlet connection:	Smooth pipe
Type of outlet connection:	Smooth pipe
Size of inlet connection:	36/40/50
Size of outlet connection:	22/32
Pressure rating for connection:	PN 1,5
Number of leads:	3X0,75MM2
Liquid:	
Liquid temperature range:	0 .. 50 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	280 W
Rated power - P2:	0.16 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	1.3 A
Cos phi - power factor:	0.95
Number of poles:	2
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Thermal protec:	THERMIK S06-160-05
Power cable type:	H05VV-F-3G
Length of power cable:	1.2 m
Power plug:	SCHUKO
Tank:	
Tank volume nominal:	2 l
Others:	
Net weight:	4.69 kg
Gross weight:	6.25 kg
Shipping volume:	0.022 m³
Danish VVS No.:	614366632
Swedish RSK No.:	5886548
Finnish LVI No.:	4965317
Norwegian NRF no.:	9045713
Environmental approvals:	WEEE

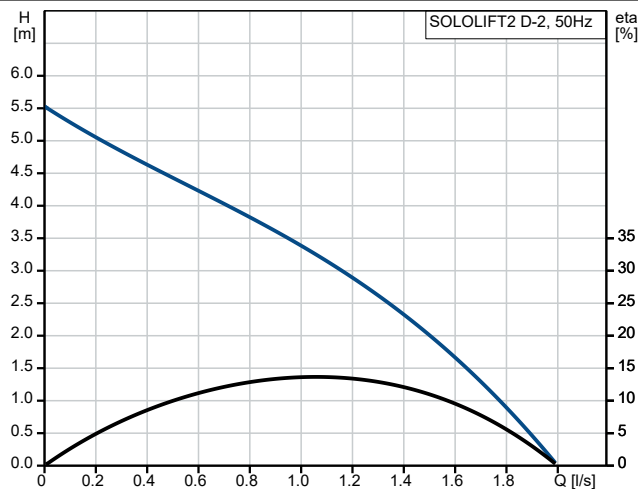

97775318 SOLOLIFT2 D-2 50 Hz

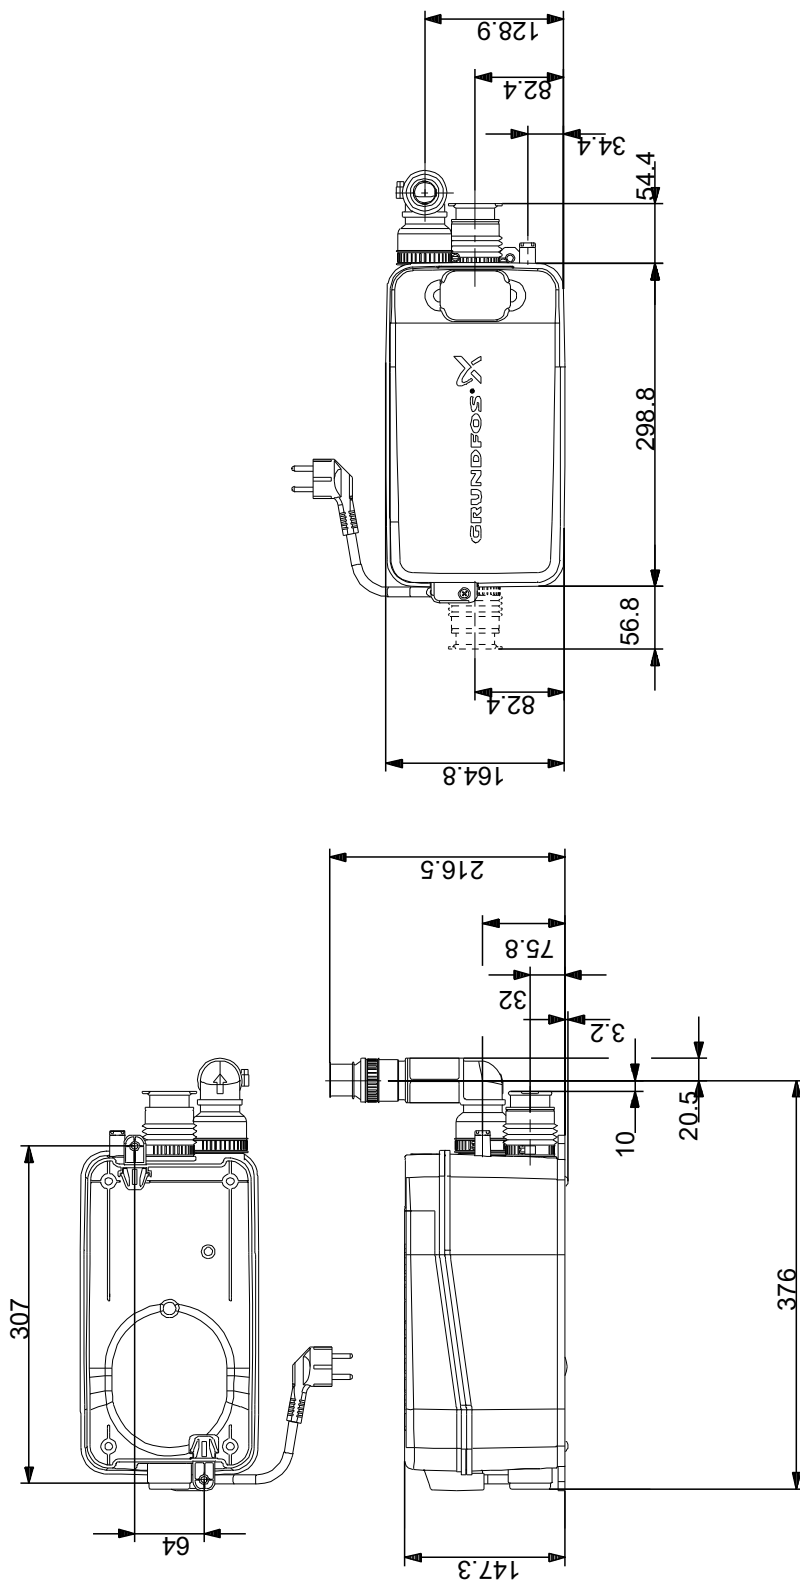

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.